

TMG4220

GNSS disciplined time & frequency generator

The TMG4220 is a GNSS disciplined time & frequency generator specifically designed for low noise applications. The equipment is housed in 1U 19" standard case. GNSS signal is used for long term disciplining of the internal oscillator.

GNSS

The internal GNSS receiver is a specific receiver dedicated to time application. It is a multi-constellation model able to acquire at the same time two constellations amongst GPS, GALILEO, GLONASS and BEIDOU. It delivers a very high precision UTC second reference pulse.

Irig-B generator

The equipment includes a IRIG time code generator that allows to provide:

- an IRIG-B12x signal (amplitude modulated analog signal) on both outputs.
- An unmodulated signal IRIG-B00x (DCLS) on a RS485 serial link.

These signals are in phase with the internal 1PPS equipment itself synchronized on the 1PPS of GNSS reference.

Oscillator

An internal OCXO type oscillator provides a 10 MHz frequency used to maintain time. The stability of this oscillator is better than $\pm 5 \times 10^{-10}$ per day in case of loss of external time sourcing. When disciplined by the GNSS, the long-term stability remains better than 5×10^{-11} .

NTP Service

The TMG4220 includes a time service implementing standard NTP protocol (Network Time Protocol) allowing any computer or equipment linked to the network to synchronize. Customer's computers can be synchronized with an accuracy of 1 to 10 ms. NTP client software must be installed on each client for its synchronization with the server.


Remote control

The remote control of the equipment is done via the network, using:

- The SNMP standard protocol (MIB provided)
- A proprietary UDP or TCP protocol
- An internal web server

Configuration

The overall configuration of the unit is stored on a removable SDCARD memory which allows remote software update easily.

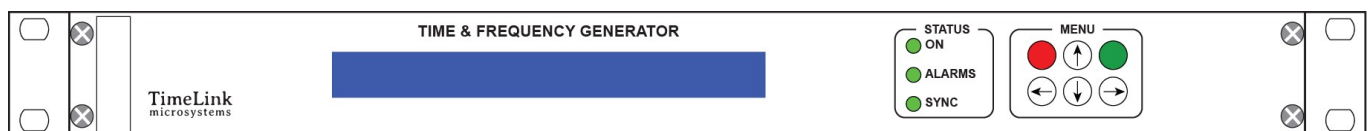

IMG4220 front panel

Specifications

Outputs

1 PPS output

2 outputs

TTL level

Accuracy of ± 100 ns relative to UTC when locked to GNSS.

IRIGB OUTPUT 2

Selectable format on both types of outputs:

IRIG B12x 2 outputs

Modulated code (B12x): 3V ± 0.5 V peak-peak 1/1: 1/3 ratio isolated by transformer. BNC connectors (analog)

IRIG B00x 1 output

Non modulated DCLS
RS422/RS485 interface

NMEA OUTPUT 1

Output frames in standard NMEA GGA and RMC Emission at 4800 baud, 1 time per second on connector "OUTPUT 1" DB9.

Electrical interface RS232

10 MHz Outputs

4 outputs

Level +13 dBm ± 1 dBm, 50 Ω

Guaranteed Phase noise:

1Hz	<-100 dBc/Hz
10Hz	<-130 dBc/Hz
100Hz	<-150 dBc/Hz
1 KHz	<-155 dBc/Hz
10 KHz	<-155 dBc/Hz
100 KHz	<-155 dBc/Hz
1MHz	<-155 dBc/Hz

Spurious: < -80 dBc

Harmonics: < -30 dBc

Internal reference

OEXO type Oscillator, 10 MHz

free running mode:

Short term stability:

1s ...10s < 1.10-12

Long term stability:

1 day < 2.10-10

1 month < 5.10-9

1 year < 3.10-8

locked running mode:

Long term stability: < 5.10-11

GNSS receiver

Time dedicated receiver with TRAIM. Multi-constellation GPS, GALILEO, BEIDOU, GLONASS (2 constellations at the same time). < ± 50 ns / UTC

GNSS Antenna type

TNC connector
3V or 5V active antenna
Powered by receiver
(Antenna not included)

Console

RS232 compliant
Console for configuration & maintenance

Connectors:

1 x TNC for the GNSS antenna input
2 x BNC outputs for 1PPS
2 x BNC outputs for IRIG B12X
4 x BNC outputs Frequency 10MHz
1xSUB'D9 female "OUTPUT 1" for NMEA output
1xSUB'D9 female "OUTPUT 2" for IRIG-B DCLS output
1 x RJ45 network connection

Temperature:

Temperature: -10 ° to 60 ° C
Storage temperature: -20 ° to 70 ° C
Relative Humidity range: 10% to 90% (non-condensing)
Storage Relative Humidity: 5% to 95% (non-condensing)

Power supply:

230V AC mains supply:
EEC socket 2P + with filter & On / Off switch
voltage: 85-264VAC / 47-440Hz
Power consumption: <20W 230VAC 50Hz

Certification:

Certified Hardware CE, ROHS, REACH & free ITAR & EAR

HTTP

The integrated web server allows to monitor the status of the equipment.

NTP

Network Time Protocol
NTP (RFC 1305) SNTP (RFC 1361) using UDP 123 port.
Server configuration V3, V4 or automatic V3/V4.

SNMP

Simple Network Management (RFC 1155, 1157, 1213) V2c
SNMP provides to the network administrator the equipment status.

TCP / UDP

Remote in "push" mode (UDP) or "request / response" mode (TCP).

Dimensions:

Standard 19" 1U with Depth of 350 mm

Weight:

< 3 Kg < 4 Kg with OPT2

MTBF

> 100 000 h & >150 000 h with OPT2

OPTIONS:

OPT1: 4 RS422 NMEA & 4 RS422 IRIG B00X outputs


4 NMEA outputs (GGA, GLL, RMC, VTG, ZDA)
4 IRIG B002 outputs
RS422 electrical interface

OPT2: 2nd AC Power supply – NO IRIGB12X / NO PPS

2nd 230V AC mains supply:
EEC socket 2P + with filter & On / Off switch
voltage: 85-264VAC / 47-440Hz
Power consumption: <20W 230VAC 50Hz
> 150 000 h with OPT2 2nd AC input

OPT3: Anti-Spoofing & Anti-Jamming

Spoofing detection and Jamming reduction when used with a dedicated antenna.

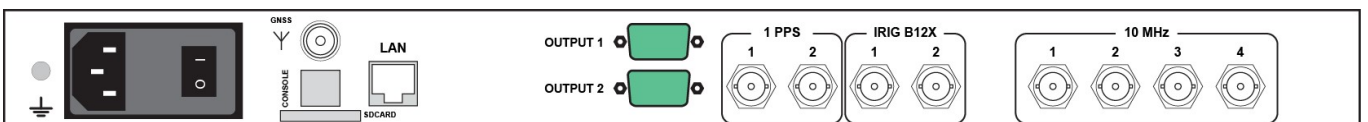

Standard TMG4220 rear panel

Ordering code

TMG4220: Standard model

TMG4220 Opt1: 4 RS422 NMEA & 4 RS422 IRIGB00X

TMG4220 Opt2: 2nd AC Power supply

TMG4220 Opt3: Anti-spoofing & Anti-Jamming

Please feel free to contact us if you need any other specifications